

COLUMBIA

HRT


High Pressure Steam Boiler

15-150 PSI (250 psi also available)

Hot Water Boiler

30 PSI (100 psi also available)

For Industrial Steam, Dry Cleaning Plants, Biodiesel Production

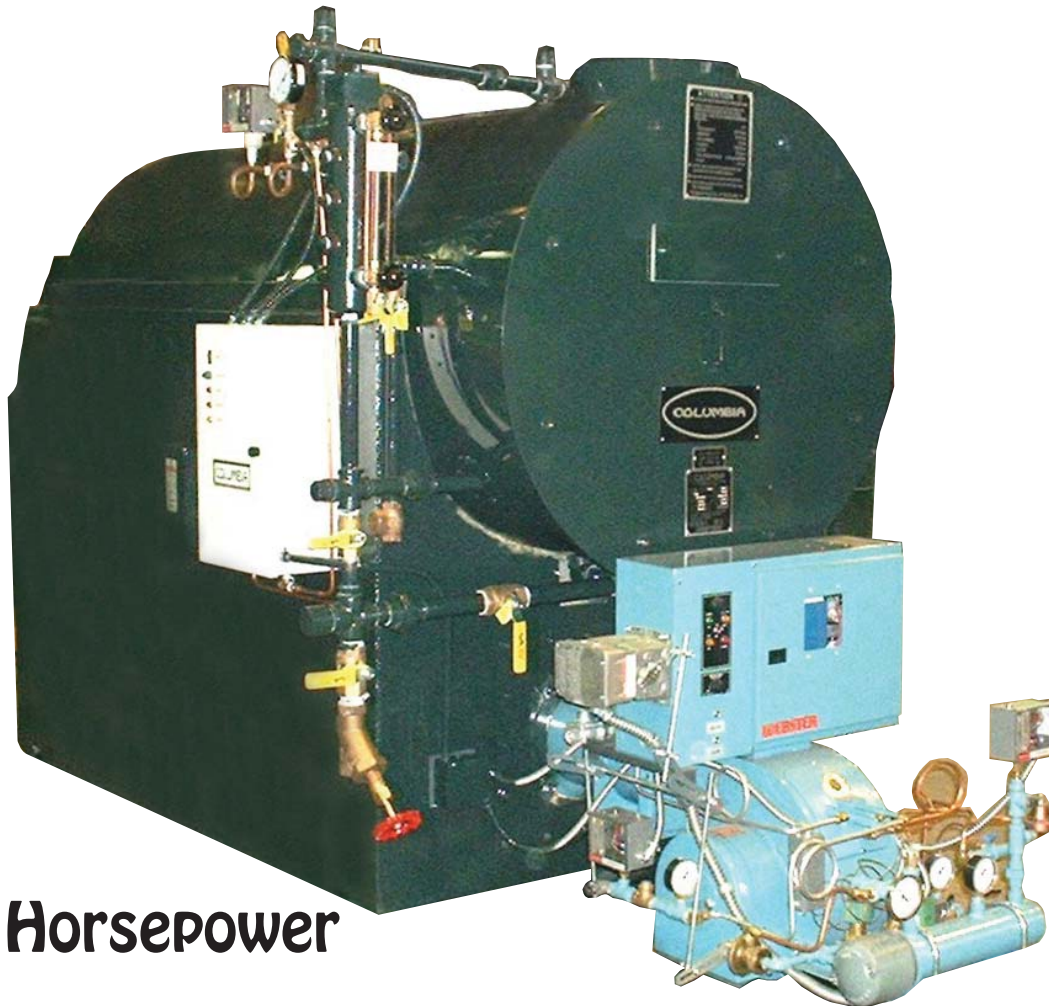

20-150 Horsepower

REAL BOILERS, built by BOILER MAKERS

Since 1936



You can do BETTER with Columbia


GOOD people. BETTER Boilers. BEST value.

www.columbiaboiler.com

HRT SPECIFICATIONS AND DATA



ASME
N.B. Registered
A.S.M.E. Construction

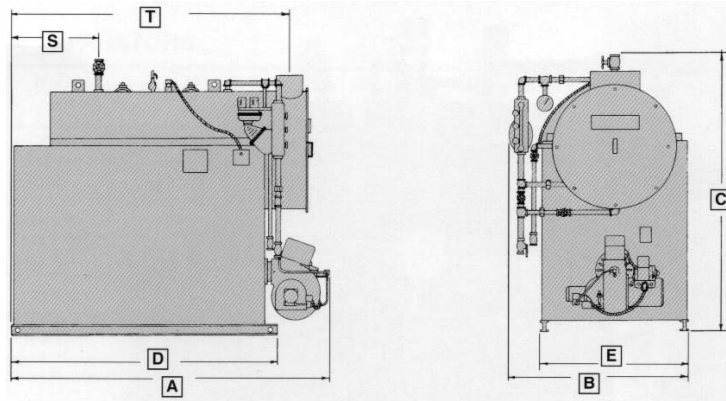

- Standard working pressures from 15-150 psi steam (250 psi also available)
- Standard working pressure 30 psi water (100 psi also available)

COLUMBIA HRT BOILERS FOR GAS, FUEL OIL, WASTE OIL, OR DUAL FUEL

BOILER HP RATING		20	30	40	50	60	70	80	100	125	150
Waste Oil Firing Rate (max.) gals./hr.		6.00	9.00	12.00	15.00	18.00	21.00	24.00	30.00	37.50	45.00
Burner Input MBTU/hr.		840	1260	1680	2100	2520	2940	3360	4200	5250	6300
Boiler Output MBTU/hr.		672	1008	1344	1680	2016	2352	2688	3360	4200	5040
Steam/hr. Lbs.		690	1035	1380	1725	2070	2415	2760	3450	4312	5175
Heating Surface sq. ft.		120	200	290	290	415	415	668	668	668	797
Normal Water Volume gals.		68	115	145	145	185	185	326	326	326	396
Steam Volume gals.		80	140	86	86	136	136	205	205	205	250
Total Heat Exchanger Volume gals.		148	255	231	231	321	321	531	531	531	646
PACKAGE BOILER	Length ‡ A in.	90	106	146	146	156	156	181	181	181	210
	Width B in.	47	53	53	53	59	59	68	68	68	68
	Height C in.	74	80	80	80	88	88	102	102	102	102
	Floor Space in.	8x13	9x15	9x15	9x15	10x15	10x15	12x20	12x20	12x20	14x26
MINIMUM DIMENSION	Length D in.	84	101	101	101	101	101	133	133	133	154
	Width E in.	37	43	43	43	49	49	58	58	58	58
	Height in.	67	71	71	71	82	82	98	98	98	98
BASE DIMENSION	Length in.	69	83 ^{1/2}	83 ^{1/2}	83 ^{1/2}	81	81	126 ^{1/4}	126 ^{1/4}	126 ^{1/4}	167
	Width in.	37	43	43	43	49	49	58	58	58	58
	Height in.	52	53 ^{1/4}	53 ^{1/4}	53 ^{1/4}	61 ^{1/4}	61 ^{1/4}	74 ^{1/2}	74 ^{1/2}	74 ^{1/2}	74 ^{1/2}
HEAT EXCHANGER	Diameter in.	30	36	36	36	42	42	48	48	48	48
	Length in.	69 ^{3/4}	85 ^{3/4}	85 ^{3/4}	85 ^{3/4}	86 ^{1/2}	86 ^{1/2}	109 ^{1/2}	109 ^{1/2}	109 ^{1/2}	130
COMBUSTION CHAMBER	Volume cu. ft.	9.3	19.6	24.2	24.2	43.3	43.3	72.9	72.9	72.9	90.1
Normal Water Line to Floor in.		56	57	63	63	71	71	86	86	86	86
Center Line of Burner to Floor in.		17	16 ^{1/2}	16 ^{1/2}	16 ^{1/2}	20 ^{1/4}	20 ^{1/4}	23	23	23	23
Stack Diameter, inches		12	14	14	14	16	16	18	18	18	22
Ht. from floor in.		72	76	76	76	87	87	104	104	104	104
T in.		78 ^{3/4}	93	93	93	94	94	119	119	119	145
Steam Outlet Size in.		1	1 ^{1/4}	2	2	2 ^{1/2}	2 ^{1/2}	3	3	3	4 Fig.
Ht. from floor C in.		76	82	82	82	92	92	112	112	112	112
S in.		26	26	26	26	27	27	32	32	32	32
Feed Water Inlet Size in.		3/4	3/4	3/4	3/4	3/4	3/4	1	1	1	1
Blow Down Size in.		1	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/2}
Hand Hole	Top Shell in.	3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}	(2) 3x3 ^{3/4}
Hand Hole	Front Head in.	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}	2 ^{3/4} x3 ^{1/2}
Manhole Front Head in.						12x16	12x16	12x16	12x16	12x16	12x16
Approx. Shipping Wt. lbs.		4000	5300	6300	6300	7800	7800	14,400	14,400	14,400	16,500

Completely assembled, piped, wired & factory tested with steam pressure gauge, water level gauge, gauge cocks with ball checks, gauge glass protector assembly, steam safety valve, steam supply ball valve, (supplied on 20 to 50 HP boilers ONLY), boiler and water column blowdown valves, hand hole inspection plate assemblies, 12"X16" manhole assembly (supplied on 60 HP and larger boilers), immersion feedwater pipe, jacket and 1" fiberglass insulation, combination low water cut-off and pump control, additional probe type low water cut-off with manual reset, steam pressure control, steam hi-limit pressure control with manual reset, and U.L. listed burner with safety and operating controls. Water trim also available. Consult factory for water fitting sizes. Special Permitting May Be Required for waste oil operation.



COLUMBIA BOILER COMPANY
P.O. Box 1070, Pottstown, PA 19464
610) 323-2700 • Fax (610) 323-7292
www.columbiaboiler.com